

COMFORT AND ELEGANCE IN AUTO DESIGN

Contoloru Violeta^{1,a}, Didu Anca^{2,b}, Rotea Cristina^{3,c}, Magdalena Dragovic^{4,d} and Duta Alina^{5,e}

^{1,2,3,5}University of Craiova, Faculty of Mechanics, Craiova, Romania

²University of Belgrade, Faculty of Civil Engineering, Belgrade, Serbia

^adumitru.violeta@yahoo.com, ^bankadidu11@gmail.com, ^cccploscaru@yahoo.ro, ^dmegi188plus@gmail.com,

^eduta_alina@yahoo.com

Abstract Today we are witnessing a strong interference between industry and art. It can even be appreciated that an authentic artistic industry was created, which consists in the manufacture of products that combine useful qualities with aesthetic ones, going up to the deep psychological comfort that the product creates with the help of aesthetic value. The concept of industrial aesthetics, the argumentation of the beauty problem, the aspects, the guidelines and the own observations presented in the paper, to which is added an algorithm for the aesthetic evaluation of a product (beauty, attractiveness), reveals the numerous possibilities that the designer has at hand to meet the aesthetic requirements (comfort, elegance) of the products. The aesthetic indicators include appreciation criteria regarding the shape of the product, the ratio of shape-structure-functionality, shape-material, shape-color-ornament, shape-color-fashion-details, environmental form, appearance and finish, packaging and presentation of the product, expressivity trademarks etc. The design and aesthetics of the products are assets in the competitive struggle and elements of real differentiation of the products.

Keywords: Car products; design for aesthetics; comfort; elegance.

1. INTRODUCTION

The practice has shown that a car whose design is done according to market preferences, is not necessarily a market success. An eloquent example was given by the launch of the Ford EDS 44, designed in detail after a long and expensive market study, which was a financial failure for the Ford trust. The conclusion is that the creative genius of the designer cannot be replaced.

Industrial aesthetics, or engineering design is aesthetics (the science of beauty) that deals with the artistic features of the products. It harmoniously combines art with technique, the beautiful with the functional. In both pure aesthetics and industrial aesthetics, some fundamental notions are used: harmony, proportion, symmetry, rhythm, contrast.

Beauty, as a fundamental component of aesthetics, is an intrinsic feature (property) of a product capable of awakening in the user states of satisfaction, emotion and aesthetic joy. The aesthetic component [1] plays two primary roles in the life cycle of a product:

- (A) Discovering by the engineer the solutions with aesthetic value;
- (B) Discovering by the user of the product the meaning with aesthetic value.

The basic aesthetic components of the products are: shape-volume-spatiality; external detailed appearance and significant sensory and emotional content. The aesthetic products display specific features such as: diversity, originality, uniqueness and creativity of constructive solutions.

One of the important aspects that can elevate the aesthetic value of a product is its elegance. This consists of: (a) the simplicity of the structural solution - a simpler solution that corresponds correctly to the loads and forces applied; (b) clarity of the solution - a solution that directly resolves the mechanical requirements; (c) economics - to use components as little as possible and require labor as little as possible; (d) - harmonious properties - the dimensions, the distribution and the density of the constructive elements to be chosen in a harmonious and integrated way.

Aesthetics is not attached to a construction as an ornament detail. It must be integrated into the objective. Structural elements cannot be treated as decorations. Also, the beauty of the product is not a luxury to the good constructive solution. It is a consequence of the mechanical form, the spatiality, costs and harmony of the elements. Goldman [2] proposed a classification of aesthetic evaluation terms into the following eight categories: evaluation (beautiful, ugly, sublime, frightening); formal (balanced, graceful, concise); emotional (sad, angry, cheerful, clear); evocative (powerful, agitated, funny, hilarious, boring); behavioral (slow, bouncy, jaunty); representation (realistic, distorted, artificial); perceptually (alive, boring, bright); historical (derivative, original, conservative).

The product model defines the structure and association of the elements (components) in a system, specifying the interfaces (connections) of the elements with the outside. The association of the elements is realized along the connections through relations. In Figure 1: (a) the component represents an identifiable material assembly, which may be: a single part (gear) or a group of parts (gearbox); (b) the linkage is a feature of a component, which allows an outside view of the component; (c) the relationship expresses a union between two or more links.

The multi-product model represents the product seen from the specific point of view of each specialist participating in the design, based on entities [3].

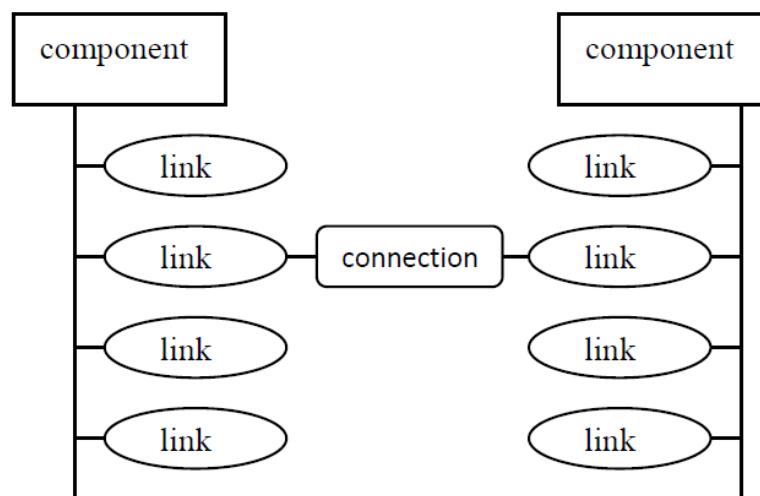


Figure 1. The structure of a product model.

2. DESIGN FOR AESTHETICS

The real motivation in the case of designing the products is the fulfillment of the needs of the human society, needs not only related to the functions of the product, but going to the deep psychological comfort that the product has with the help of aesthetic value.

Aesthetics is a necessity as important as the functions, safety in operation or the cost of execution. The attribution of the primacy of one of these aspects leads to a visible imbalance in the final solution.

Figure 2 shows the basic needs pyramid, as identified by Maslow [4]: the need for personal fullness; need for esteem: self-esteem and respect for others, power, success; needs of affection: couple, family, community, society, cohabitation, love; security needs: survival, comfort, peace; physiological needs: hunger, thirst, thirst, sleep.

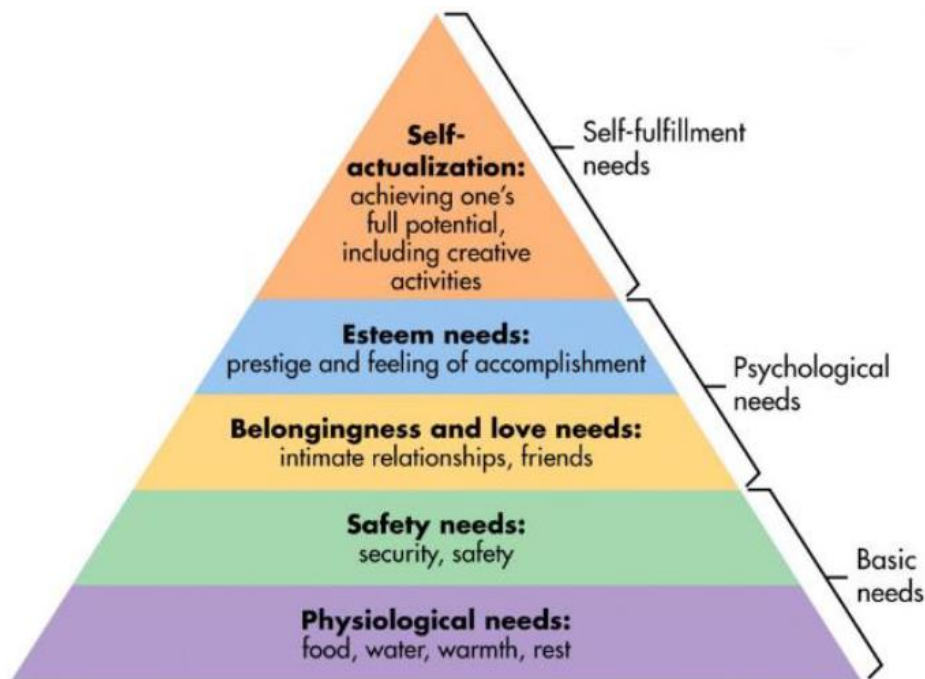


Figure 2. Pyramid of human needs identified by Maslow [4].

For each product, when it is designed and executed, there are several obstacles that the engineer must overcome, namely: financial, political, cultural, ecological, environmental, lack of imagination and overall vision, etc.

The product engineer must find the most appropriate technical solutions, following guidelines that also include the concern for beauty. The aesthetic solution of the product must be representative for the level of evolution of the company. The specialist must adapt to the changes that the company suffers, in order to be able to offer optimal solutions to its needs.

Each action, from the moment of generating an idea, has a potential that must be properly exploited, in order to achieve products that will meet the highest needs of the clients. This involves establishing an operational engineer-producer-user feedback. Figure 3 proposes a potential information flow for the process of creating aesthetic products [5].



Figure 3. The informational flow in the process of creating aesthetic products.

The solution of the aesthetic quality of a contemporary product is based on a series of criteria, namely:

- technical criteria: the qualitative performances, their correspondence with the requirements of the beneficiaries, the degree of capitalization of the resources;
- market criteria: customer interest, demand size, competitiveness;
- economic criteria: economic efficiency;
- social criteria: raising the standard of living, avoiding pollution, disturbing the ecological balance.

It is imperative to know the tools, the means, the resources, the freedoms and the restrictions that have an impact on the project, from the beginning of the design process. The design of the products implies the harmonization of the following factors:

- Technical and scientific basis (structure, materials);
- Execution technologies (processes, technologies);
- Methods for designing and rendering shapes (dimensions, proportions).

The aspects to be considered are: trust between the designer and the beneficiaries; professional ethics; compliance with laws; judicious exploitation of resources; the social factor; aesthetic component; exploitation current technologies; logistics; sensory effects; physical reasoning; the laws of kinematics; spatial limitations.

Here are some principles [6] that can lead to the successful design of products with aesthetic value:

Order. The spatial arrangement of the structural components ensures the product visual comfort. However, a too strict abandonment of rules for aesthetic design can lead to the eclipse of other values. Besides the order that brings unity and balance, disorder can be used to the advantage of the product if it brings visual tension;

Proportions, rhythm, symmetry / asymmetry. The proportions must be fair and can have different and relative values for each particular case in order to be expressive. The golden section is a solution that reflects a fair proportionality. Where possible, symmetry is recommended;

Generating surfaces and choosing colors. If the structural form of the product responds and expresses its behavior (static, dynamic), then that structure is the most mechanically good solution. From a chromatic point of view, it is desirable that the product borrows from the colors of the palette in the vicinity or the environment, or to choose light colors.

The conformation, the unit. The form must follow the function in the context of respecting the other aesthetic parameters. If a shape is functionally correct, the result does not necessarily have aesthetic value.

Functionality. The functional purpose of the product must be reflected by the attention paid to the other aspects;

Repeatability. Sometimes it is appropriate to introduce the repetitiveness of similar elements, but taken to the extreme it generates monotony. Designing the product with an increased dose of creativity and fantasy turns the product into an interesting one;

Lighting. For each particular product, some structures have either a higher transparency, which gives them elegance, or a higher dose of massiveness, which increases the feeling of stability;

The feeling of stability. The structural elements of the product must inspire resistance, stability and general safety, in order to create mechanical, physical, visual and psychological comfort;

Product integration in the environment. The product must integrate harmoniously with the environment, paying attention to the volume occupied in the space, the materials used and the colors;

Responsibility, novelty and progressive vision. The engineer must be a man of his time, keeping up with the innovations in the field;

In the modern era, engineers have begun to exploit the source of inspiration that the living world represents. Bodies capable of self-generation, creatures with special physical and mechanical properties, respectively different species of animals can generate a large number of solutions for aesthetic products. There are numerous ways of implementing the beautiful in engineering, such as:

- Choosing a material and experimenting its possibilities of use;
- Concentration of attention and interest in lowering the cost of making the product;
- Production of prototypes and direct study on them for modeling the aesthetic solution.

The digital revolution that the contemporary society knows must be exploited in favor of identifying, designing and executing structural solutions of products that correspond to the current demands of the company. The parametric approach is one of the possible solutions.

Aesthetic appreciation. Next, we propose an algorithm for the aesthetic evaluation [7] of a product (beauty, attractiveness):

Step 1. Identify all the different properties ($i = 1, 2, 3, \dots, n$) that determine the aesthetic quality of the product. Normally, the proportionality of the component elements, the color contrast, the optical

corrections, the color range, the nature of the surfaces, are taken into account. Establishing the "n" properties, as a rule, remains unchanged and is applied for the appreciation of all types of models made.

Step 2. For each "i" quality, the M_i is established experimentally, using the relation:

$$\sum_{i=1}^n M_i = 1 \quad (1)$$

Step 3. Experimentally evaluate the k_i qualities for each property "i" (points, percentages, units). For each example, this appreciation may be different. Thus, the structure shape of a product will be appreciated with the index K_i .

Step 4. Determine the KEI aesthetic index for the quality "i" with the relation:

$$K_{EI} = f(K_i \cdot M_i) \quad (2)$$

in which, K_i – is the aesthetic index for the quality „i”; M_i – is the mass for each „i” quality.

The evaluation of the aesthetic indicator is done with the help of mathematical. Thus, the KEP complex aesthetic appreciation of the product is calculated with the relation:

$$K_{EP} = \sum_{i=1}^n (K_i \cdot M_i), \text{ where } 0 \ll K_i \ll 1 \quad (3)$$

There are three levels of models that can be combined:

(a) Working models. Sometimes called "white models" or "volume models", they correspond to the realization, more or less completed of the project in three dimensions. The materials used are various: cardboard, wood, resin, etc. The objective of this type of models is to be able to reach the product, to mold the outline and to evaluate the overall appearance, respectively the lines and surfaces. The realization costs are small, firms can achieve more for different solutions.

(b) Appearance models. These may or may not be functional. The cost is generally high. They simulate the whole together with the accessories and markings. These models are necessary because they highlight the future product before its realization or technical development. Such a model is needed in the following situations: presentation in front of the management, the clients, the preparation of the catalog, the tests for acceptance of concepts, the salon exhibition, etc.

(c) Functional models (prototypes). In the industry, the prototype must be identical to the future product that will be manufactured in series. Generally, it presents the approximate appearance of the product and includes all the functions of use. Their purpose is to validate, on the one hand, the implantation of the different product components (internal / external architecture) and, on the other hand, the operating modes of the product. The prototypes serve to validate the chosen options.

The computer offers wide possibilities of expression in the design of the form, the choice of the material, in the movements simulation for flexible elements, etc.

3. SHAPE, AS AN ELEMENT OF AESTHETIC ASSURANCE

Car aesthetics are terms of function, structure and form. The products are designed to perform certain functions. The functions will be performed by certain structures (mechanical, electrical, electronic).

A structure in space results in a certain external form. The structure and form are found in relationships of mutual determination. The structure requires a certain organization of the form, but there are cases when the form can change the structure.

The shape of the products is used to impress the user pleasantly, and for this impression the following are required: the chosen form have to be unitary; the details to be clear and logical; to highlight the functions of the platform; to suggest how to use it; to have an economic justification; to be simple and easy to use.

When creating the aesthetic aspect of an industrial product [8], elements that will be used in works of art will have some particularities: (a) the materials that are chosen need to fulfill three criteria: the functional criterion (the material will have to first meet the purpose for which was chosen and also for manufacturing technology); the aesthetic criterion (the material has to be pleasant - visual or tactile); the economic criterion (to combine functional and aesthetic in an economic result); (b) the line gives the impression of movement; geometric shapes that include lines are recommended because they generate a sense of balance; (c) color is the element that defines the aesthetic value of the industrial product. In form and color, there must be a harmony so constructed that the two aesthetic elements accord with each other. When choosing colors, space rules are taken into account that allow for an optimal visualization, as well as an emotional value;

The implications of applying industrial aesthetics are economic (productivity, operating life), social (labor humanization) and educational (product care, aesthetic values).

The shape, as an element of ensuring a pleasant aesthetics of cars, must fully correspond to the respective function and the execution technology. The structural elements of the contour as well as the other objective elements of the form, exert an important influence on the human psyche, which must be taken into account in the elaboration of the form of the products.

Size is an important means of composition, one of the principles that organize the shape of the manufactured product. A proportionally designed car has the best indicators of rigidity. The following types of proportions are distinguished: the arithmetic ratio, $H1 - H2 = H2 - H3$; geometric ratio, $H1 : H2 = H2 : H3$; eight harmonic proportions, $a : c = (a-b) : (b-c)$; $a : c = (b-c) : (a-b)$; $b : c = (b-c) : (a-b)$; $a : b = (b-c) : (a-b)$; $a : c = (a-c) : (b-c)$; $a : c = (a-c) : (a-b)$; $b : c = (a-c) : (b-c)$; $b : c = (a-c) : (a-b)$.

In the stage of engineering composition, the designer begins the processing of the form by means of human. Its sketches differ from the engineering ones (it fixes first of all the human figure - the "humanization of the car" begins). It is true, having different destinations (ordinary, sports, racing) the position of the human body changes, which determines in each case, the shape and dimensional structure of the car [9] (Figure 4).

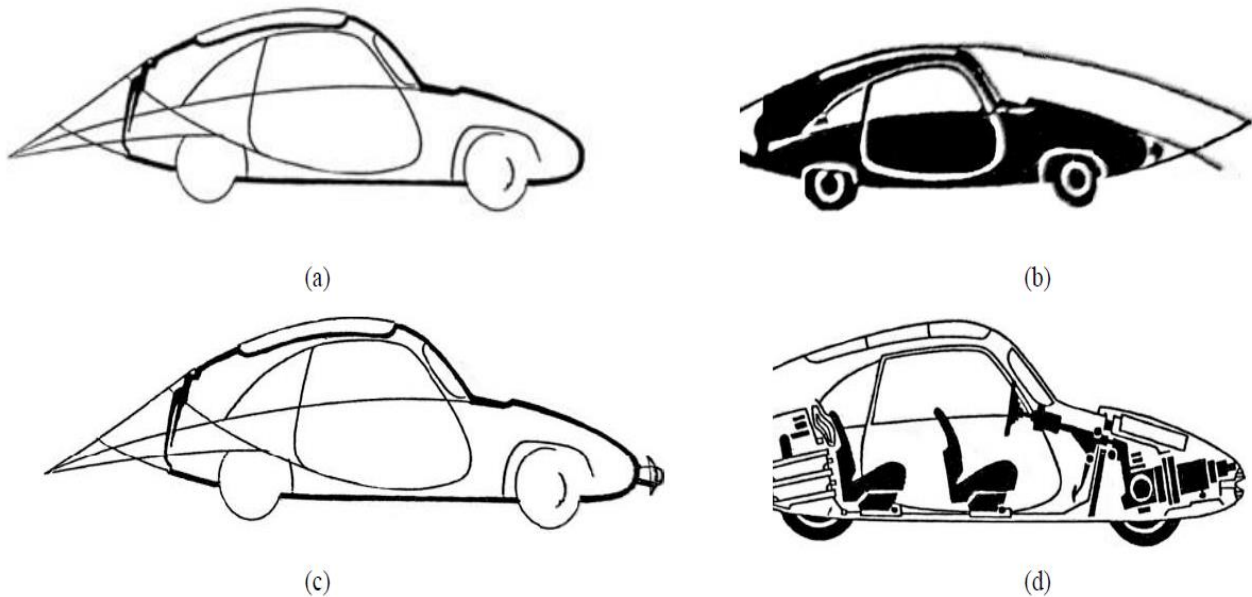


Figure 4. The structure and form of a car [9].

Another aspect of aesthetics is the effect of color on the shape products. The compensatory or contrasting colors, for example, carefully chosen, according to scientific criteria, act effectively on the form. Complementary colors, light and color density create harmony and beauty.

The cars from the beginning of the century were characterized by monochrome, the majority being black (90%) and only a few in white numbers. Technical considerations prevented the appearance of bright colors until 1936, when the use of organic pigments made their existence possible. Only the 1960s brought essential changes in the habits of consumers and producers. It is considered that the '70s brought to light and vibrant colors, partially confirmed in the '80s, and the last period was dominated by slightly more discreet colors. Beyond statistics, we can say that the use of a wide range of colors, with good taste and discernment, is a factor in promoting these products, contributing to the increase of the environment quality .

Exterior design. The car design targets not only the form of the car, but also focuses on the combination of form and function. Aesthetics value will also have to correspond with ergonomic functionality and utility functions. In particular, electronic components will provide more challenges for car designers (displays, GPS navigation, satellite radio, HD radio, mobile TV, MP3 players, video playback and smartphone interfaces). The car design includes: exterior design, interior design, color and total design.

The detailed drawings are executed and approved and digital models are developed together with the drawings (Figure 5). The clay model is still the most important tool to evaluate the design of a car and is therefore used in the industry. The data from these models are then used to create the dimensions and layout of the final design (Figure 6).

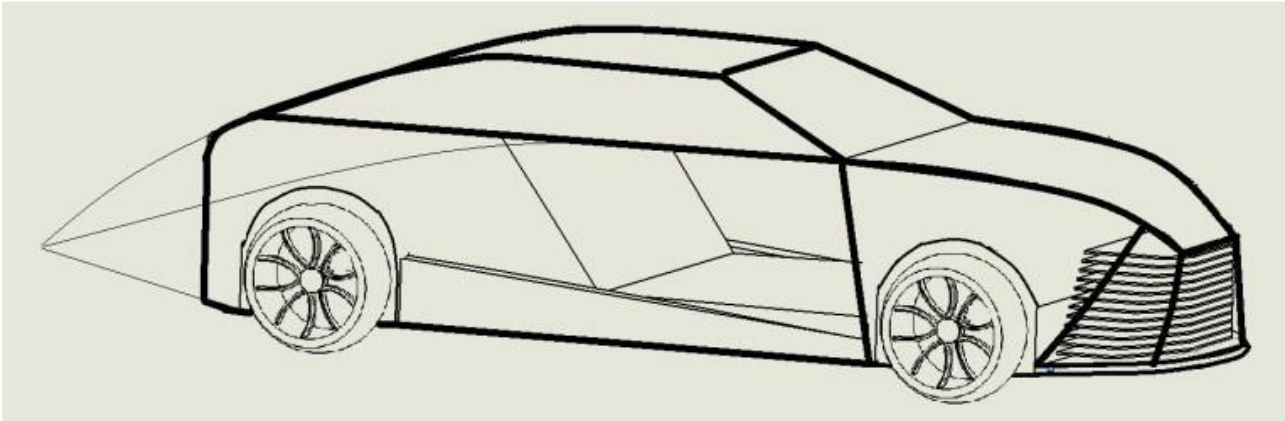


Figure 5. Structure body for a car.



Figure 6. Final design model.

Interior design. The engineer responsible for designing the interior of the car develops the proportions, shape, placement and surfaces for the instrument panel, chairs, doors, poles, ornaments, etc. The priority is to create a balance between functional elements and passenger comfort.

4. THE FINAL COLOR AND DESIGN

The designer is responsible for research, design, as well as the development of all interior and exterior colors and materials used on a car. These include paints, plastics, fabric designs, leather, carpet, headliner, wood trim, color, contrast, texture, pattern and must be carefully combined to give the car a unique indoor environment experience. The final designers work closely with exterior and interior designers. Designers are inspired by other disciplines, such as: industrial design, fashion, home furniture and architecture. Trend components are researched in order to track design influences that

relate to the automotive industry. The designer then uses this information to develop themes and concepts that are then further refined and tested on car models.

Car bodies can be created in a variety of different styles and bodies. These styles are largely dependent of a car's classification in terms of price, size, and overall market destination. In car engineering, the body of a car (Figure 7) is the structure that protects the occupants structural panels, doors and other movable panels.

Style of color. The chromatic arrangements should be viewed from the following points of view: functional - utility; physio - psychological; aesthetic - artistic. The red color is perfectly perceived in the morning. The green color is very well perceived throughout the day. The blue color is perceived well in the morning, but the quality of perception increases in the afternoon. Blue has a good influence on vision. Good visibility is an essential quality, mandatory in conventional signaling systems or for highlighting parts, levers or control panels. One method for increasing color visibility is contrast. The following scale of chromatic contrast visibility was formed: yellow on black is the most visible combination; white on blue; black on orange; black on yellow; orange on black; black on white; white on red; red on yellow; green on white; orange on white; red on green; the latter becomes increasingly difficult to distinguish. According to general considerations, the usual functional colors for cars are: blue (light blue - figure 7a, medium vblue - figure 7b); green in different shades (dark green - figure 7c, varnish - figure 7d); red (figure 7e); silver (figure 7f); dark with warm shades; turquoise blue in different shades. The request for other colors are turquoise and especially orange-brown.

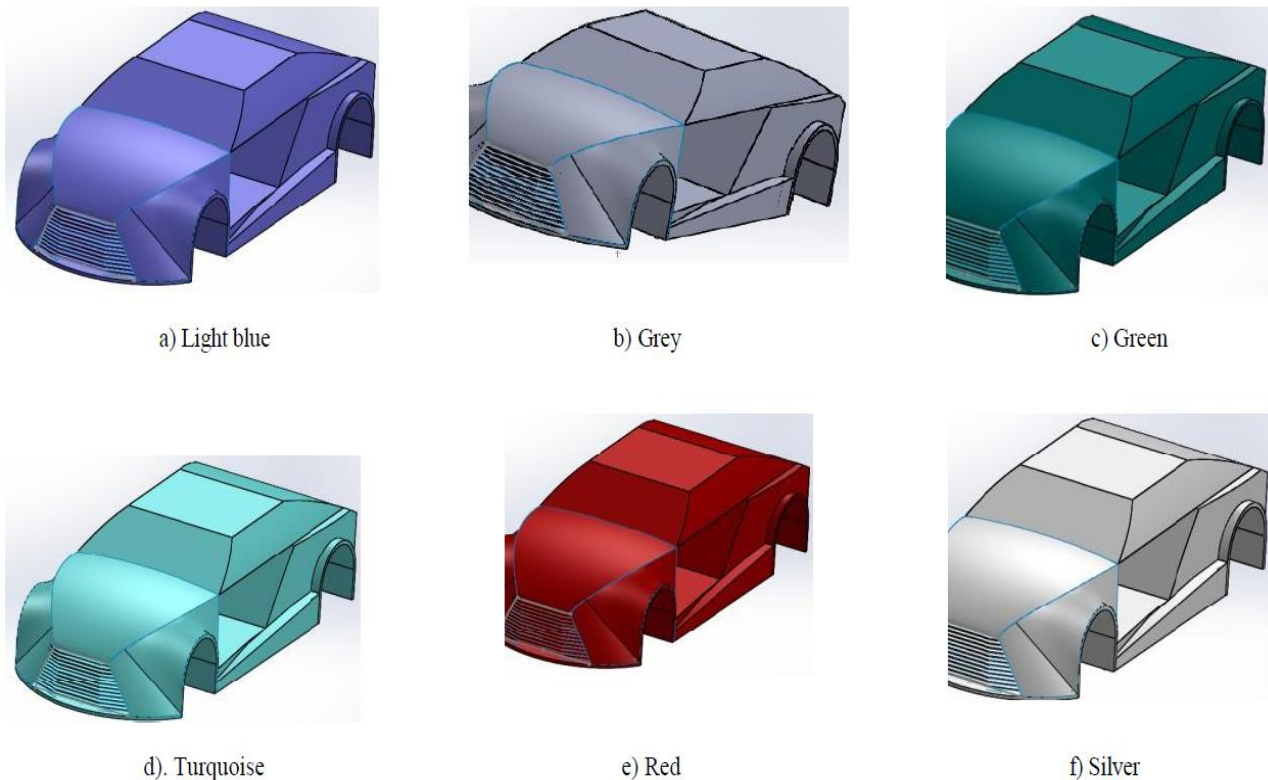


Figure 7. Style of color.

5. CONCLUSIONS

Industrial products, through their functional role, offer users certain services in response to their demands. The products can be completely new or improved variants of some already existing products. They can present important functional characteristics, obtained by the incorporated technologies or modern approaches of quality, cycle and life, design, aesthetics etc.

Regardless of the car segment we refer to, we allow ourselves to maintain the close connection between the car's design and its technical and performance requirements, fuel consumption, comfort and safety, ergonomic and ecological restrictions.

The process of technical creation (innovation), representing an investment in the long term future, must be conducted like any other activity that brings benefit to the company. Therefore, the industry needs specialized engineers in the field, ie design engineers. A design engineer must do research activity, have a thorough knowledge of marketing, know the legislation governing, the financing of innovation at different decision levels, know the technological principles of product development, their limitations.

Every creative process is influenced by marketing studies, by the wishes of potential buyers. We are astonished by the speed of changes and innovations in the mass of production cars. The global trends aimed at developing the urban cars segment with comfortable interior space, with reduced exterior dimensions, lack of sobriety and particularly low-cost finishing elements. The studies of different companies deepens this theme, proposing original and advantageous solutions, including those related to modularity and flexibility;

Increasing the number of models with family tint, either monovolume or break, characterized by a generous interior space is another goal for the companies. Also, increasing in sales the number of electric vehicles and the segment of minivans, 4x4s and pickups; transforming the jeep into family sedans (opinion polls show that only about 10% of the owners use this kind of vehicles for their original destination). These small 4x4 cars , used in the city, have the following advantages: high position of the driver position, large loading space, increased safety in winter due to the large ground guard and all-wheel drive.

References

- [1] Wladyslaw T., 1978, *The history of aesthetics*, Merdiane Publisher, Bucharesti.
- [2] Goldman A. H., 1995, *Aesthetic Value*, Westview Press, Colorado.
- [3] Draghici G., 2002, Product modeling in integrated engineering,
https://ibn.idsi.md/sites/default/files/imag_file/Modelarea%20produsului%20in%20ingineria%20integrata.pdf
- [4] McLeod S. A., 2020, Maslow's hierarchy of needs. Simply Psychology.
<https://www.simplypsychology.org/maslow.html>
- [5] Goldman A. H., 1995, *Aesthetic Value*, Westview Press, Colorado.
- [6] Coelho D., 2011, *Industrial Design - New Frontiers*, InTech Open.

IETI Transactions on Ergonomics and Safety

<http://ietl.net/TES/>

2021, Volume 5, Issue 1, 36-47, DOI: 10.6722/TES.202105_5(1).0005

- [7] Bodack K. D., 1967, *Aesthetic Measurement and Subjective Evolution of Visual Objects*, University of California, Berkeley.
- [8] Mayall W. H., 1967, *Industrial design for engineers*, Liffé Books, London.
- [9] Garnich R., 1968, *Construction, Design und Aesthetic*, Stuttgart.